


DIGITAL INNOVATION

Di866 PROFESSIONAL



THE WORLD PREMIER



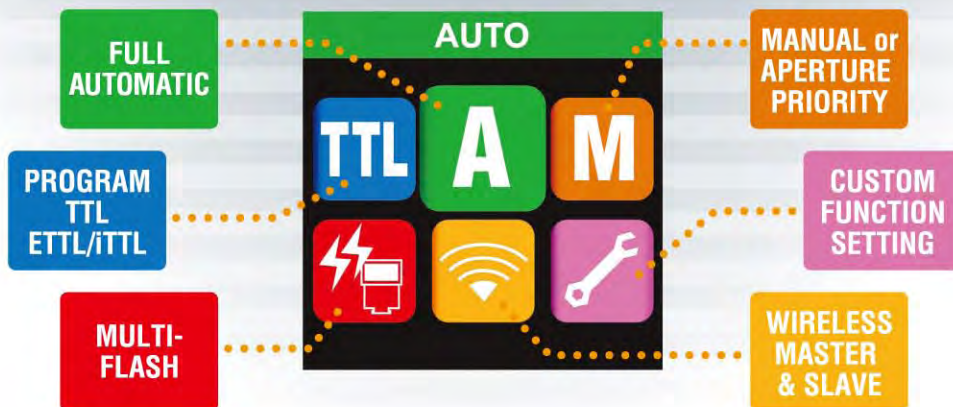







Nissin Group is pleased to announce its flag-ship model, Di866 PROFESSIONAL . Nissin Di866 is designed for digital SLR cameras with many world's first and highest features in the class of clip-on type flash unit.












Many features are installed, yet, the easy reading color display keeps the simple usability of Nissin's design concept.

This is the flash unit which professional and advanced photographers have been waiting for.

Di866, outstanding features

-  **Compatibility:** Di866C - Canon digital SLR cameras and powershot hotshoe cameras
Di866N - Nikon digital SLR cameras and coolpix hotshoe cameras.
-  **World's highest power in clip-on class** ----- G.No.60 (ISO100 in meter at 105mm)
G.No.198 (ISO100 in feet at 105mm)
-  **Auto rotation two-way color display** ----- Display awlays stay upright even flash unit turns for longitudinal frame.
-  **Fill-in sub-flash** ----- A small sub-flash fill-in while the main flash turns for bounce lighting.
-  **315V high voltage power connector** ----- High voltage power pack enable the recycle time less than 1 sec.
-  **Wireless TTL for Canon and Nikon DSLR** ---- The best solution for off camera multi-flash technique.
-  **Digital/Analog slave** ----- Slave function against film type camera and studio flash.
-  **External self auto-exposure sensor** ----- Flash itself sets exposure value for automatic exposure metering.
-  **High Speed Synchronization** ----- FP flash function synchronizes to all high speed shutter.
-  **Battery Magazine quick loading** ----- 2 sec. loading, Nissin original battery magazine.

More features

-  "MY TTL": Nissin original feature. TTL default level is adjustable.
-  Power zoom of 24 -105mm. Manual motor zoom is possible.
-  Manual power ratio of 8 levels from 1/1 through 1/128.
-  Flash Exposure Bracketting.
-  TTL flash power compensation of ± 3.0 Ev.
-  Auto shut off energy saving system.
-  Modeling light when using in wireless off-camera flash mode.
-  Catch-light reflector built-in.
-  Wide angle diffuser built-in.

General Specifications

G.No.	Main flash 60(ISO 100, m) or 85(ISO 200, m) at 105mm lens angle coverage Sub flash 12(ISO 100, m) or 17(ISO 200, m) for 35mm lens angle coverage
Compatibility	Type C for Canon digital SLR and Powershot hotshoe cameras Type N for Nikon digital SLR and Coolpix hotshoe cameras
Power Source	Battery magazie - 4 x LR6, (Lithium, NiMH and Oxiride are usable) Power Pack - Nissin Power Pack Pro 300 (NiMH exclusive battery cluster)
Recycling time	3.5 sec. by Battery Magazine with 4 x NiMH 0.5 sec. by Nissin Power Pack Pro 300
Number of flashes	150 full power flashes per set of NiMH batteries 300 full power flashes by Nissin Power Pack Pro 300
Camera Synch.	E-TTL and iTTL hotshoe (on camera flash) PC cord service connector (off camera flash) Wirelss synchronization, (off camera flash)
PRODUCT RELEASE	April, 2009 for America
Distributed by	Nissin Japan Ltd. www.nissin-japan.com Nissin Marketing Ltd. www.nissndigital.com